


Request for Contract Update


Pursuant to the terms of contract <u>number</u> #R19120 notify and receive approval from Region 4 ESC when there approved without the prior authorization of Region 4 ESC request.	e is an update in the contract. No request will be officially
Wenger Corporation (Contractor) this date 12/13/2023	hereby provides notice of the following update on
without supporting documentation will be returned This fo	d shall provide supporting documentation. Requests received orm is not intended for use if there is a material change in wnership, merger, etc. Material changes must be submitted m.
☐ Authorized Distributors/Dealers	🖾 Price Update
Addition	<u>xx</u> Supporting Documentation
Deletion Supporting Documentation	
Products/Services XX New Addition Update Only XX Supporting Documentation	Discontinued Products/ServicesSupporting Documentation
States/Territories Supporting Documentation	Other 1- product deletion Supporting Documentation
Notes: Contractor may include other notes regarding the Please see attached annual pricing change Commodity documents included Product Addition: Stagetek Outdoor- Product Product Deletion: Multi-use Shield- Discont	ct information enclosed
Submitted By: <u>Jackie Berg</u>	Approved by Email: Date 12/13/2023 4:36 PM CST
Title: National Sales Manager	Denied by Email: Date
nue. Ivalional Sales Managel	DocuSigned by:
Email Address: jackie.berg@wengercorp.com	Region 4 ESC Jorgannie Carter, Region 4 CF O

STAGETEK® OUTDOOR STAGING



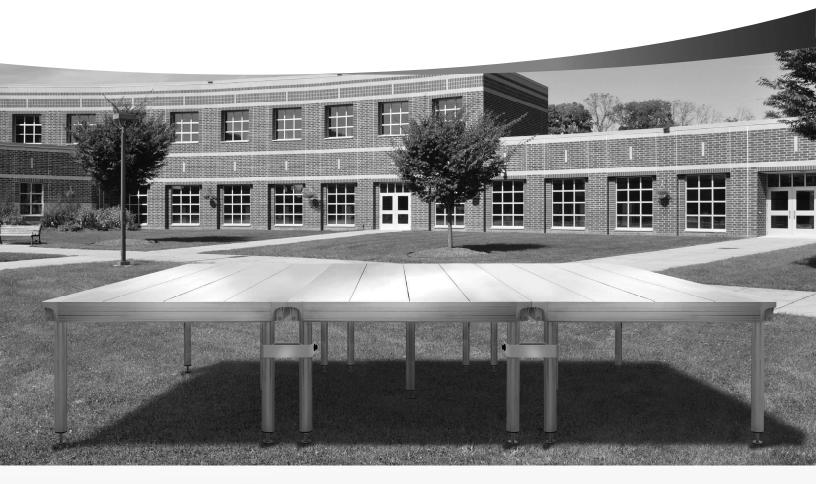









Staging that performs – rain or shine

Traditionally, where most stages have shown their weaknesses is outdoors. Most stage materials on the market weren't designed to handle the rain, heat, humidity and cold. StageTek's new outdoor decks are built for the elements so you don't have to panic when the forecast turns murky. Plus, the simple and adjustable leg options make assembling a stage over uneven terrain fast and easy.

These new decks add to Wenger's StageTek® System that has proven itself over the past decade in thousands of schools, theatres, event centers and more. You simply can't find a more complete portable staging system that has the capability and versatility that StageTek has. It's stronger, easier to handle and faster to set up. And, it's available with all the accessories you need like stairways, guardrails, skirting and more.*



STAGETEK® OUTDOOR STAGING

- ✓ All-Weather Design Aluminum deck designed for outdoor use in all types of weather. Decks have spaces for drainage and a textured surface to improve traction and reduce shine. Will not rot, peel, warp or swell. Non-combustible.
- ✓ Strong and Stable Impressive load ratings that exceed performance expectations for uniform load, side load and point load.
- ✓ Versatile Create any outdoor platform configuration at the height you need – even over uneven terrain. StageTek connectors and accessories help you create a safe, finished outdoor stage.
- ✓ Storage Space Standard rectangular decks feature spaces under each platform unobstructed by folding frames or braces allowing for easy storage/stowage space.
- ✓ Fast, Easy, Intuitive Setup Almost anyone can set up a StageTek stage – and it requires no tools. Decks are designed for safer, easier handling and feature rounded contours that are ergonomically sized for a secure power grip (closed grip).
- ✓ Compatible Works with existing StageTek decks, legs and accessories.
- ✓ Warranty Five-year warranty gives you peace of mind. And if any parts need to be replaced, it can be done easily with common tools.



A crew of two can set up an entire StageTek stage – with accessories – quickly. StageTek goes up without pins, tools or separate assemblies. Just slip the legs into the sockets and tighten.



StageTek's outdoor textured surface improves traction and reduces shine. Spaces for drainage ensure water doesn't pool on deck.



Decks

- Rectangular decks are available in the following sizes:
 - 4' x 4' (1219 x 1219 mm): 72 lb (33 kg)
 - 4' x 6' (1219 x 1829 mm): 102 lb (46 kg) with center leg kit: 104 lb (47 kg)
 - 4' x 8' (1219 x 2438 mm): 132 lb (60 kg) with center leg kit: 134 lb (61 kg)

Legs

Fixed Height, Adjustable and Telescopic Legs Available from 4"-120" (102 mm - 3048 mm)



OPTIONAL ACCESSORIES:

*StageTek accessories are not intended for prolonged outdoor exposure. Please contact your Wenger Representative for additional information.



Guardrails, articulating and fixed stairways

Not shown: drapery, skirting, chair stops, guardrails with infill panels, box steps and more.

Connectors

StageTek has a variety of connectors to secure your stage and make it safe for performers and staff.







Connection brackets determined by layout. Please consult with your Wenger Representative for suggested options.













WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | wengercorp.com 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

JR CLANCY

Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209-9713

GEARBOSS Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

© 2023 Wenger Corporation USA/6-23/500/W/LT0228B





StageTek® Outdoor Staging System


StageTek is a highly flexible design and can be used to accommodate many unique and custom applications. Please contact your Wenger Representative to discuss your needs.

System Description

- Rectangular decks are available in the following sizes:
 - 4' x 4' (1219 x 1219 mm): 72 lb (33 kg)
 - 4' x 6' (1219 x 1829 mm): 102 lb (46 kg) with center leg kit: 104 lb (47 kg)
 - 4' x 8' (1219 x 2438 mm): 132 lb (60 kg) with center leg kit: 134 lb (61 kg)
- Five-year warranty
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative

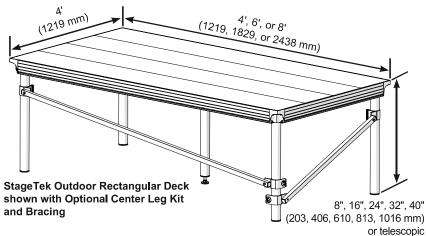


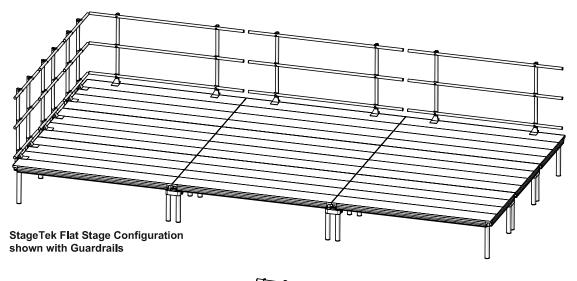

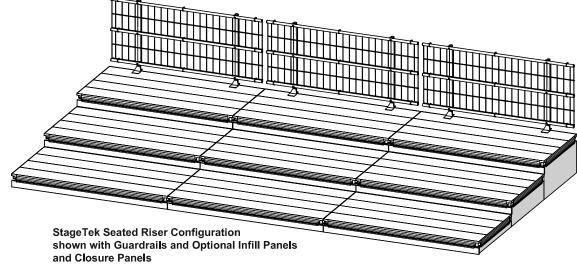


Features

- Platform decks are extruded aluminum plank with spaces for drainage and textured surface to improve traction and reduce shine
- Closed multi-cavity cross section for increased strength and resistance to twisting
- StageTek Load Ratings as measured on a 4' x 8' (1219 x 2438 mm) rectangular deck:
 - Standard Uniform Live Load for deck with 4 legs: 125 lb/ft² (6 kN/m²), meets L/150 deflection criteria
 - Heavy-Duty Uniform Live Load for deck with center leg (or smaller deck): 150 lb/ft² (7.2 kN/m²), meets L/180 deflection criteria
 - Lateral Live Side Load: 12 lb/ft² (0.6 kN/m²) based on deck top surface area, meets IBC code
 - Point Load: 500 lb (2.2 kN) applied via 1" (25 mm) diameter pin
- Standard rectangular decks feature spaces under each platform unobstructed by folding frames or braces allowing for easy storage/ stowage space under the system
- Frame and edging are fabricated from 4" (102 mm) tall aluminum extrusion; extrusion is designed with a slight recess for hook and loop skirting attachment and also features notches to accept accessory attachments
- An aluminum extrusion center support rail is featured on deck sizes:
 - 4' x 8' (1219 x 2438 mm), 4' x 6' (1219 x 1829 mm) and 4' x 4' (1219 x 1219 mm)
- The frame is designed for safer, easier handling and features rounded contours ergonomically sized for a secure power grip (closed grip)
- Standard unit-to-unit connectors are 2" (51 mm) wide, heavy-duty hook-and-loop straps with a metal d-ring; two straps are provided with each rectangular deck to connect unit legs together
- · Resistant to rain, snow, hot and cold; will not rot, peel, warp or swell; non-combustible
- · Leg braces are available to provide additional stability

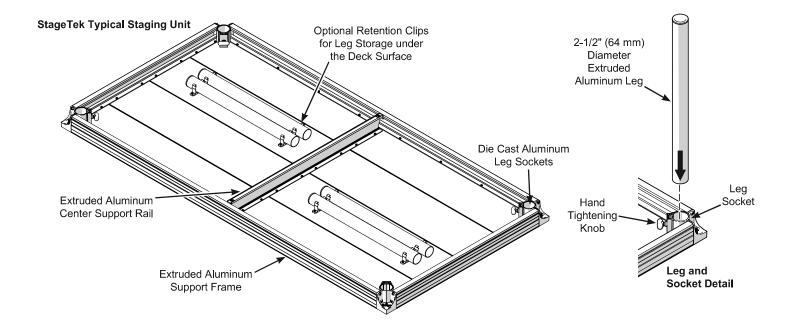

Leg Options

- · Available leg options include fixed height, adjustable height and telescopic
- Standard rectangular decks have four die cast aluminum leg sockets legs are quickly secured without tools by just rotating the knob
- Standard legs are fabricated from 2-1/2" (64 mm) diameter aluminum extrusions and are finished with non-marring cap
 - Available in lengths that result in the following deck heights:
 - 8" (203 mm), 16" (406 mm), 24" (610 mm), 32" (813 mm) and 40" (1016 mm)
- Adjustable telescopic legs feature a threaded leveling foot finished with a rubber pad and non-rattling telescopic adjustment secured with a quick-release pin and jam nut; Available in lengths that result in the following deck heights:
 - 16"-28" (406-711 mm), 24"-40" (610-1016 mm) and 30"-54" (762-1372 mm)
- Custom leg sizes are available
- Wood blocking is recommended for soft ground surfaces




Accessories

Accessories are not intended for extended outdoor usage

Staging Universal Deck & Rail Cart


- 113K001 85 lb (38 kg); fits through a 32" (813 mm) door
- · Holds six StageTek rectangular decks (without accessories) or six StageTek guardrails
- Decks and guardrails can be mixed on the same cart
- · Heavy-duty, non-marring locking casters and ratcheting nylon safety strap

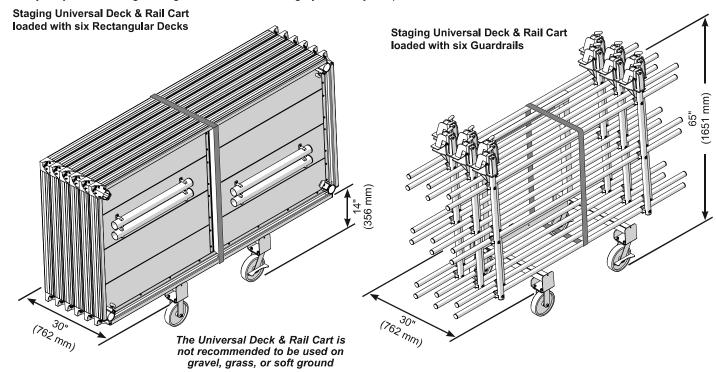

Stairways - Fixed Height and Adjustable

, ,	
Fixed Height Stairways	Adjustable Height Stairways
2-Step: 281A100 55 lb (25 kg)	3-Step: 281A201 107 lb (49 kg)
3-Step: 281A101 76 lb (34 kg)	4-Step: 281A202 122 lb (55 kg)
4-Step: 281A102 94 lb (43 kg)	6-Step: 281A203 160 lb (73 kg)
	8-Step: 281A204 188 lb (85 kg)


- Adjustable height stairways are ideal for custom-height systems and for systems that are frequently set up at different heights
- Stairways feature a hook bracket to function with StageTek decks
- Stairs feature aluminum extruded treads and include permanent handrails on both sides

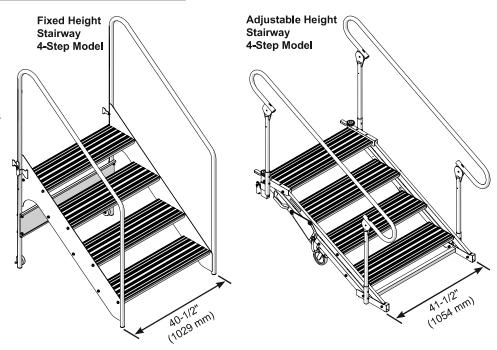

Accessories (continued)

Guardrails

- · Guardrails comply with IBC code requirements for loading
- Guardrails feature two uprights and three cross bars; optional infill panels can be added that comply with the IBC 4" (102 mm) sphere code
- · Guardrails can function as a chair stop
- Guardrails are 42" (1067 mm) high with a black powder-coat paint finish
- Guardrails clamp to the stage deck without the need for tools




Clamps, Connectors and Braces


- · Optional retention clips for leg storage mount under the deck to provide retained leg storage
- · A variety of metal leg to leg, leg to deck, overlap and anchor brackets are available
- Stabilizing braces are recommended for heights 40" (1016 mm) and above


Backdrop and Closure Panels

- Drapery is available in heights to match the staging elevation and in a wide variety of colors
- 100% fire retardant woven polyester attaches with hook and loop fastening strips
- Backdrop frame attaches to guardrails and positions a drapery 8' (2438 mm) above the stage; available in 4' (1219 mm), 6' (1829 mm), and 8' (2438 mm) widths

Solid side and front closures are ideal for seated riser systems; constructed of 3/4" (19 mm) thick group 1 veneered plywood with various surface options available; edges are finished in a thermofused black edge band; connects to the rail without tools via an extruded PVC clip running the length of the closure





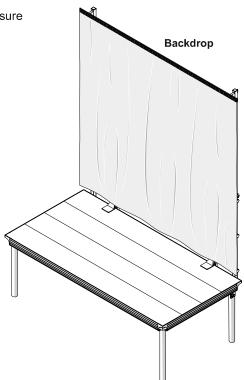









Owatonna Office: Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com

555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

Syracuse Office: Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209-9713